


► **TIRES FOR RIGID DUMPERS**



► **TIRES FOR LOADERS AND DOZERS**

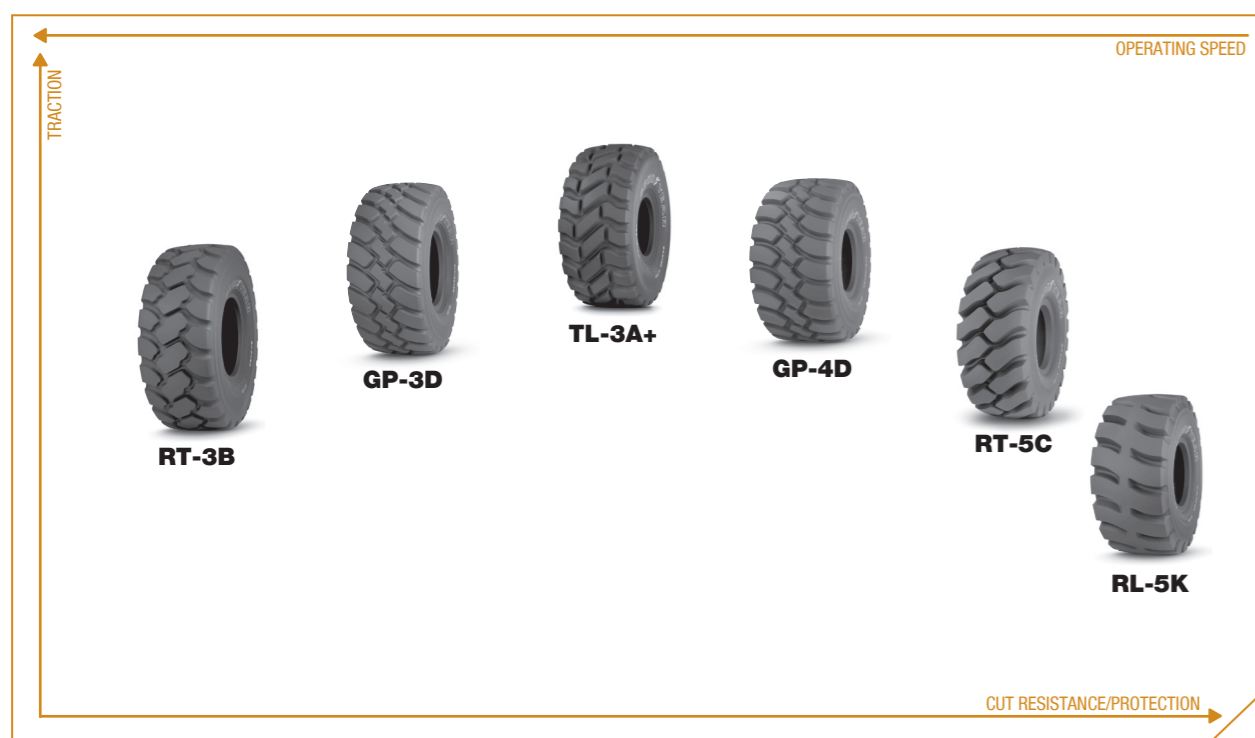

► **DEALER:**



► **OTR TIRES**

RADIAL AND BIAS TIRES

- Technical data
- Features and benefits
- Tire selection charts

Goodyear Dunlop Tires Operations S.A.  
 Av. Gordon Smith  
 L-7750 Colmar-Berg

Telephone (352) 8199-1      Telefax (352) 8199 2181

<http://goodyearotr.com>  
 Produced by Goodyear Dunlop Tires Operations S.A.  
 035/0210/LUX-ENG

## RADIAL

### TIRES FOR LOADERS AND DOZERS 10KM/H

#### ▶ RT-3B

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
17.5R25	176A2		
20.5R25	186A2		
23.5R25	195A2		
26.5R25	202A2		
29.5R25 Hi-Stability	216A2		



- Superior resistance to rock cuts and penetration
- Improved traction and mobility
- Excellent self-cleaning

#### ▶ GP-3D

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
		550/65R25	182A2
		600/65R25	187A2
		650/65R25	193A2
		750/65R25	202A2



- Excellent traction
- Comfort
- Enhanced sidewall protection

#### ▶ TL-3A+

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
17.5R25	176A2	750/65R25	202A2
20.5R25	186A2		
23.5R25	195A2		
26.5R25	202A2		
29.5R25 Hi-Stability	216A2		



- Excellent forward and lateral traction
- Non-directional design
- Outstanding ride comfort

#### ▶ GP-4D

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
20.5R25	186A2	775/65R29	206A2
23.5R25	195A2	875/65R29	214A2
26.5R25	202A2		
29.5R25 Hi-Stability	216A2		



- Excellent traction
- Comfort
- Large tread depth
- Abrasion resistant

## BIAS-PLY

### TIRES FOR INDUSTRIAL AND PORT SERVICE

#### ▶ ELV-3A

100 Series	Load/ Speed Index	80 Series	Load/ Speed Index
14.00-24	28PR		
16.00-25	32PR		
18.00-25	40PR	23.5-25	36PR



- Container handlers
- For forklifts and reach stackers

#### ▶ ELV-4B

100 Series	Load/ Speed Index	80 Series	Load/ Speed Index
18.00-25	40PR		
18.00-33	36PR		



- For forklifts and reach stackers

## TIRES

### OPTIMUM TIRE SELECTION

#### ▶ TIRES FOR ARTICULATED DUMP TRUCKS



#### ▶ TIRES FOR INDUSTRIAL AND PORT SERVICE



► **RL-4K HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
18.00R25	204A2	875/65R33	223A2
17.5R25	182A2	(35/65R33)	
20.5R25	193A2	45/65R39	242A2
23.5R25	201A2	(1150/65R39)	
26.5R25	209A2	45/65R45	244A2
29.5R25 (24/24)	216A2	(1150/65R45)	



- Deep 150 level tread depth
- For heavy load and carry operations
- Bulk and aggregate applications
- Industrial applications
- High durability
- Long tread life

► **RL-5K HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
18.00R25	204A2	875/65R33	223A2
17.5R25	182A2	(35/65R33)	
20.5R25	193A2	45/65R39	242A2
23.5R25	201A2	(1150/65R39)	
26.5R25	209A2	45/65R45	244A2
29.5R25 (24/24)	216A2	(1150/65R45)	



- Deep 250 level tread depth
- For the most severe conditions
- Excellent sidewall protection
- High durability and longevity

► **RL-5K HALF TRACK HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
18.00R25	204A2	875/65R33	223A2
17.5R25	182A2	(35/65R33)	
20.5R25	193A2	45/65R39	242A2
23.5R25	201A2	(1150/65R39)	
26.5R25	209A2	45/65R45	244A2
29.5R25	216A2	(1150/65R45)	



- Deep 250 level tread depth
- Half Smooth for improved impact resistance on external side

► **RT-5C HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
23.5R25	201A2		
26.5R25	209A2		



- 250 level L-5 Traction tyre
- High resistance to impacts and cuts
- Ideal where traction is important

► **RL-3S HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
20.5R25	193A2		
23.5R25	201A2		
26.5R25	209A2		
26.5R29	211A2		



- Deep 100 level tread depth
- High resistance to impacts and cuts
- Good traction properties

► **RL-4S HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
18.00R25	204A2	875/65R33	223A2
17.5R25	182A2	(35/65R33)	
20.5R25	193A2	45/65R39	242A2
23.5R25	201A2	(1150/65R39)	
26.5R25	209A2	45/65R45	244A2
29.5R25	216A2	(1150/65R45)	



- Deep 150 level tread depth
- For extreme conditions
- Enhanced sidewall protection

► **RL-5S HI-STABILITY**

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
18.00R25	204A2	875/65R33	223A2
17.5R25	182A2	(35/65R33)	
20.5R25	193A2	45/65R39	242A2
23.5R25	201A2	(1150/65R39)	
26.5R25	209A2	45/65R45	244A2
29.5R25	216A2	(1150/65R45)	



- L5 tyre for extreme conditions
- Quarries and mines
- Excellent sidewall protection
- High durability and longevity

## BIAS-PLY

### TIRES FOR LOADERS 10KM/H

#### ▶ SGL

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
15.5-25	12PR		
17.5-25	12/16PR		
20.5-25	12/16PR		
23.5-25	16PR		



- For loaders
- Rough-Terrain forklifts
- Excellent traction
- Good stability

#### ▶ HRL-3A

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
15.5-25	12PR		
17.5-25	16PR		
20.5-25	16/20PR		
23.5-25	20PR		



- For loaders
- Dump trucks
- Abrasion resistant

#### ▶ HRL-5A

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
20.5-25	12/16PR		
23.5-25	16/20PR		
26.5-25	26PR		
29.5-29	22/34PR		



- For loaders
- Deep 250 level tread depth
- For severe conditions

#### ▶ NRL-5A

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
		35/65-33	30PR
		40/65-39	36PR
		41.25/70-39	42PR
		45/65-45	38/46PR



- For large loaders
- Excellent stability

#### ▶ NSM-5B

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
		45/65-45	38/46PR



- For large loaders in extreme conditions
- Excellent stability
- Highly abrasion resistant
- For the severest conditions

## RADIAL

### TIRES FOR MOTOR – GRADERS 40KM/H

#### ▶ RT-3B

80 Series	Load/ Speed Index
17.5R25	176A2
20.5R25	186A2
23.5R25	195A2



- 115 level tread depth
- Improved traction and mobility
- Excellent self-cleaning

#### ▶ TL-3A+

80 Series	Load/ Speed Index
17.5R25	176A2
20.5R25	186A2
23.5R25	195A2



- Excellent forward and lateral traction
- Non-directional design
- Outstanding ride comfort

#### ▶ GP-4D

80 Series	Load/ Speed Index
20.5R25	186A2
23.5R25	195A2



- Deep 150 level tread depth
- Good comfort
- Abrasion resistant

#### ▶ RT-5C HI-STABILITY

80 Series	Load/ Speed Index
23.5R25	201A2
26.5R25	209A2



- 250 level L-5 Traction tyre
- High resistance to impacts and cuts
- Ideal where traction is important

#### ▶ RL-5K HI-STABILITY

80 Series	Load/ Speed Index
17.5R25	182A2
20.5R25	193A2
23.5R25	201A2




- Deep 250 level tread depth
- For the most severe conditions
- Excellent sidewall protection
- High durability and longevity

## BIAS-PLY

### TIRES FOR MOTOR – GRADERS 40KM/H

#### ▶ SGG

100 Series	Load/ Speed Index
13.00-24	12PR
14.00-24	12/16PR
16.00-24	16PR



- For graders
- Excellent traction
- Good stability

## RADIAL

### TIRES FOR RIGID DUMPERS 50KM/H

#### ▶ RL-3+

100 Series	Load/ Speed Index
16.00R25	177B
18.00R25	185B
18.00R33	191B
21.00R35	201B
24.00R35	209B



- Excellent forward and lateral traction
- Non-directional design
- Outstanding ride comfort

#### ▶ RL-4

100 Series	Load/ Speed Index
18.00R25	185B



- Deep 150 level tread depth
- Good comfort
- Abrasion resistant
- Long tread life
- Quarries

#### ▶ RT-4A

100 Series	Load/ Speed Index
18.00R33	191B
24.00R35	209B
27.00R49	223B



- Deep 150 level tread depth
- Superb traction and comfort
- For severe applications

#### ▶ RL-4B

100 Series	Load/ Speed Index
18.00R33	191B
21.00R33	218A2



- Deep 150 level tread depth
- Superb traction and comfort
- For severe applications

## RADIAL

### TIRES FOR RIGID DUMPERS 50KM/H

#### ▶ RL-4J

100 Series	Load/ Speed Index
18.00R33	191B
21.00R35	201B
24.00R35	209B
24.00R49	215B
27.00R49	223B



- Deep 150 level tread depth
- Excellent traction
- Comfort
- For severe applications

#### ▶ RL-4J II

100 Series	Load/ Speed Index
27.00R49	223B
30.00R51	230B
33.00R51	235B



- Deep 150 level tread depth
- Superb traction
- Excellent comfort
- For severe applications

#### ▶ RL-4H

100 Series	Load/ Speed Index
27.00R49	223B
30.00R51	230B
33.00R51	235B
36.00R51	241B
37.00R57	246B
40.00R57	250B



- Deep 150 level tread depth
- Comfort
- For severe applications

#### ▶ RL-4H II

100 Series	Load/ Speed Index
33.00R51	235B
36.00R51	241B
37.00R57	246B



- Deep 150 level tread depth
- Superb traction
- Excellent comfort
- For mixed service

## RADIAL

### TIRES FOR ARTICULATED DUMP TRUCKS 50KM/H

#### ▶ GP-3D

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
		600/65R25	167B
		650/65R25	180B
		750/65R25	190B



- Excellent traction
- Comfort

#### ▶ TL-3A+

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
17.5R25	167B	750/65R25	190B
20.5R25	177B	(30/65R25)	
23.5R25	185B		
26.5R25	193B		
29.5R25 Hi-Stability	200B		



- Excellent forward and lateral traction
- Non-directional design
- Outstanding ride comfort

#### ▶ GP-4D

80 Series	Load/ Speed Index	65 Series	Load/ Speed Index
20.5R25	177B	775/65R29	195B
23.5R25	185B	875/65R29	203B
26.5R25	193B		
29.5R25 Hi-Stability	200B		



- Deep 150 level tread depth
- Excellent traction
- Comfort

## RADIAL

### TIRES FOR MOTOR – SCRAPERS 50KM/H

#### ▶ RL-3F

80 Series	Load/ Speed Index
33.25R35	212B



- Good traction
- Comfort
- Added sidewall protection

#### ▶ RL-3J

80 Series	Load/ Speed Index
33.25R35	::
37.5R39	::



- Good traction
- Excellent sidewall protection

#### ▶ RT-3A

80 Series	Load/ Speed Index
33.25R29	::



- E-3T type tyre for enhanced traction
- Cooler running

## RADIAL

### TIRES FOR CRANES 70KM/H

#### ▶ GP-2B

100 Series	Load/ Speed Index
385/95R24	170E
385/95R25	170E
445/95R25	177E



- Comfort
- Excellent stability
- Good traction

# RADIAL

## TIRES FOR INDUSTRIAL AND PORT SERVICE

### ▶ EV-4A

100 Series	Load/ Speed Index	95 Series	Load/ Speed Index
14.00R24	188A2		
16.00R25	197A2		
		480/95R25	199A2



### ▶ EV-3+

100 Series	Load/ Speed Index	95 Series	Load/ Speed Index
16.00R25	197A2		
18.00R25	206A2		
18.00R33	211A2		
		480/95R25	199A2



### ▶ EV-4J

100 Series	Load/ Speed Index	80 Series	Load/ Speed Index
18.00R33	211A2		



### ▶ EV-4S

100 Series	Load/ Speed Index	95 Series	Load/ Speed Index
14.00R24	188A2		
16.00R25	197A2		
18.00R25	206A2		
18.00R33	211A2		
(EVS-4S)		480/95R25	199A2



### ▶ EV-5S

100 Series	Load/ Speed Index	80 Series	Load/ Speed Index
18.00R25	206A2		
		23.5R25	206A2



### ▶ EV-4K 24/24      EV-5K 24/24

100 Series	Load/ Speed Index	80 Series	Load/ Speed Index
18.00R25	206A2		
		23.5R25	206A2

